


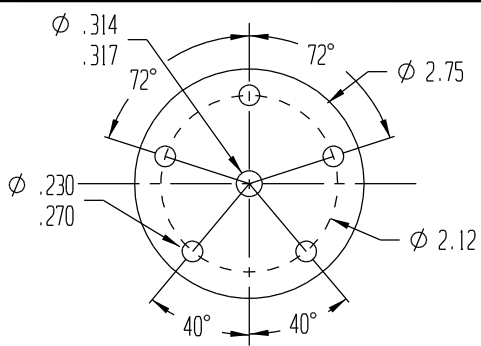

SEPARATE LEADS 24" LONG
20AWG PVC WIRES

2.75" OD x .125" THK
304 SS FLANGE

.125"

5/16" OD
SS TUBE

12.5"

11.5"

SS GRIP RING

FLOAT TYPE 11
1" Buna S.G. = .40

L1=11.5"
70 VA MAX N.D.

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF INNOVATIVE COMPONENTS, LLC. AND IS TO BE USED SOLELY AS A TECHNICAL REFERENCE BY INNOVATIVE COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL DATE

PRINT: _____

SIGN: _____



INNOVATIVE COMPONENTS

635 OLD TURNPIKE ROAD
PLANTSVILLE, CT. 06479

TITLE: STAINLESS STEEL & BUNA LOW LEVEL

MODEL: 11-AL-1111

DRAWN BY: F.J.K

DATE: 04/24/00

PART#: 92368

SHEET: 1 OF 1

SCALE: NONE

STANDARD
TOLERANCES
.000 = ± .010
.00 = ± .050
.0 = ± .100
0 = ± .200
ANGLES ± 5°
TEMP ± 5°C

FILENAME: C:\CK7\PRN\CLUST\92368

REV: